

Female Header
Pitch 2.54 mm straight

Single row, height 8.5 mm



SPECIFICATION:

Current rating: 3 A
Insulation resistance: 1000 MΩ min.
Contact resistance: 20 mΩ max.
Dielectric voltage: 1000 V AC
Operation temperature: -40 °C to +105 °C

MATERIAL:

Housing: PBT UL94V-0
Contacts: Copper alloy

FINISH:





Contacts: Gold Flash

HANDLING:

Processing: Wave soldering
Packing: Tube

TOLERANCE:

.X ± 0.25
.XX ± 0.20

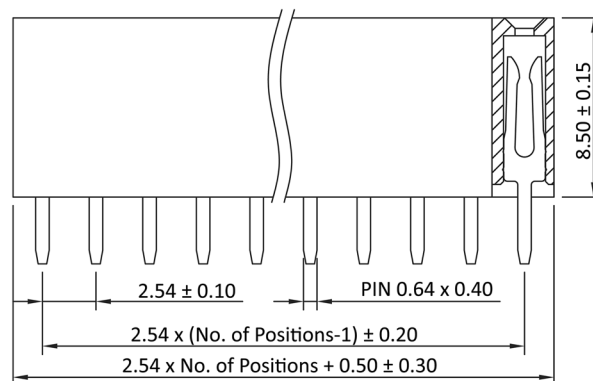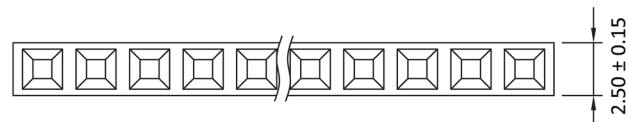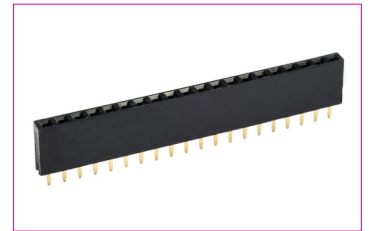

Order-Information

Identifier:

BL

Version:

G

No. of contacts:

#

Female Header Pitch 2.54 mm single row, height 8.5 mm

G: Straight

1X2: 1 x 2

1X3: 1 x 3

1X4: 1 x 4

:

1X40: 1 x 40