


MLR 21 – termopara 5 29 101 99

Groty:

Nr katalogowy	symbol	a(mm)	b(mm)
005 44 105 99	MT 1S	0,25	-
005 44 101 99	MT 1	0,25	1,6
005 44 106 99	MT 6	1,6	0,4
005 44 112 99	MT H	0,8	0,4
005 44 110 99	MT A	1,2	0,4
005 44 111 99	MT B	2,4	0,4
005 44 113 99	MT HX	0,8	-
005 44 104 99	MT 4	1,2	0,4
005 44 119 99	MT GW	2,0	-




MT H, A, B




MT HX



MTGW




MT 1S



MT 1







MT 6



MT 4


LR 21 – termopara 005 33 106 99

Nr katalogowy	symbol	a(mm)	b(mm)
4ETS	ET S	0,4	-
4ETO	ET O	0,8	-
4ETR	ET R	1,6	0,7
4ETH	ET H	0,8	0,4
4ETA	ET A	1,6	0,7
4ETB	ET B	2,4	0,8
4ETC	ET C	3,2	0,8
4ETD	ET D	4,6	0,8
4ETE	ET E	5,6	1,2
4ETF	ET F	-	1,2
4ETBB	ET BB	-	2,4
4ETCC	ET CC	-	3,2
4ETK	ET K	1,2	0,4
4ETL	ET L	2,0	1,0
4ETM	ET M	3,2	1,2
4ETP	ET P	0,8	-
4ETGW	ET GW		




WMP – termopara 005 90 008 00, WMPT


Nr katalogowy	symbol	a(mm)	b(mm)	c(mm)
NT H	NT H	0,8	0,4	8,4
NT K	NT K	1,2	0,4	8,4
NT A	NT A	1,6	0,4	9,5
NT 6	NT 6	1,6	0,4	7,4
NT B	NT B	2,4	0,8	7,8
NT C	NT C	3,2	0,8	8,2
NT D	NT D	4,0	0,8	8,6



NT AX	NT AX	1,6	0,4	8,2
-------	-------	-----	-----	-----




NT 1S	NT 1S	0,25	-	8,5
-------	-------	------	---	-----




NT 1	NT 1	0,25	-	7,4
------	------	------	---	-----




NT 1X	NT 1X	1,6	-	8,6
-------	-------	-----	---	-----



NT 4	NT 4	1,2	-	9,9
------	------	-----	---	-----




NT GW	NT GW	2,0	3,0	13,4
-------	-------	-----	-----	------




WSP 80 – termopara 005 29 161 99, WSP 80IG, MPR 80, FE 75


Nr katalogowy	symbol	a(mm)	b(mm)
005 44 437 99	LTH	0,8	0,4
005 44 403 99	LTA	1,6	0,7
005 44 405 99	LTB	2,4	0,8
005 44 407 00	LTC	3,2	0,8
005 44 409 00	LTD	4,6	0,8



005 44 413 00	LTK	1,2	0,4
005 44 414 00	LTL	2,0	1,0
005 44 415 00	LT M	3,2	1,2



005 44 420 99	LTHX	0,8	0,4
005 44 443 00	LT AX	1,6	0,7
005 44 442 00	LT BX	2,4	0,8





Scalak s.c. J. Różowski, D. Choroś
04-087 Warszawa ul. Igańska 11
e-mail:scalak@scalak.com.pl


005 44 436 99	LT 1S	0,2	1,6
005 44 435 99	LT 1	0,25	-
005 44 426 99	LT 1SLX	2,0	0,4

005 44 428 00	LT 4X	1,2	0,4
005 44 427 00	LT AX	1,6	0,8
005 44 425 99	LT 1X	2,0	0,4
005 44 439 99	LT 4	1,2	-

005 44 408 00	LT F	1,2	-
005 44 444 00	LTBB	2,4	4,0
005 44 444 00	LTCC	3,2	6,0


005 44 423 99	LT 1L	0,2	-
005 44 406 99	LT S	0,4	-
005 44 424 99	LT 1LX	0,2	-

005 44 410 00	LT GW	2,3	3,2
---------------	--------------	-----	-----

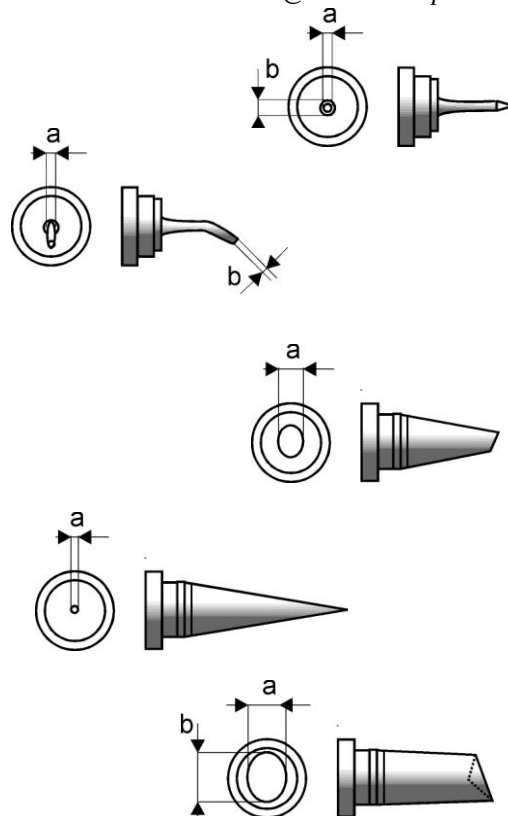

TCP 24 – magnastat 005 10 001 99, TCPS – magnastat 005 32 105 99

Nr katalogowy	symbol	a(mm)	b(mm)	T(°C)
4PTR7	PTR 7	1,6	0,7	370
4PTR8	PTR 7	1,6	0,7	425
4PTH6	PTH 6	0,8	0,4	310
4PTH7	PTH 7	0,8	0,4	370
4PTH8	PTH 8	0,8	0,4	425
4PTA6	PTA 6	1,6	0,7	310
4PTA7	PTA 7	1,6	0,7	370
4PTA8	PTA 8	1,6	0,7	425
4PTB6	PTB 6	2,4	0,8	310
4PTB7	PTB 7	2,4	0,8	310
4PTB8	PTB 8	2,4	0,8	425
4PTB9	PTB 9	2,4	0,8	480
4PTC7	PTC 7	3,2	0,8	370
4PTC8	PTC 8	3,2	0,8	425
4PTC9	PTC 9	3,2	0,8	480
4PTD7	PTD 7	4,6	0,8	370
4PTD8	PTD 8	4,6	0,8	425
4PTD9	PTD 9	4,6	0,8	480
4PTE7	PTD 7	5,6	1,2	370
4PTE8	PTD 8	5,6	1,2	425
4PTE9	PTD 9	5,6	1,2	480

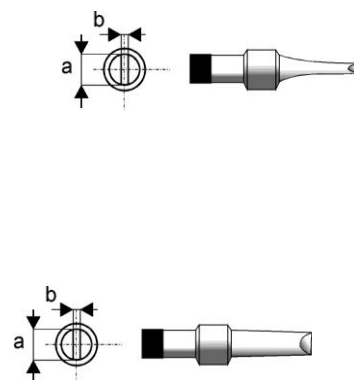



Weller®





Scalak s.c. J. Różowski, D. Choroś
04-087 Warszawa ul. Igańska 11
e-mail: scalak@scalak.com.pl

4PTK6	PTK 6	1,2	0,4	310
4PTK7	PTK 7	1,2	0,4	370
4PTK8	PTK 8	1,2	0,4	425
4PTL6	PTL 6	2,0	1,0	310
4PTL7	PTL 7	2,0	1,0	370
4PTL8	PTL 8	2,0	1,0	425
4PTM7	PTM 7	3,2	3,2	370
4PTM8	PTM 8	3,2	3,2	425
4PTM9	PTM 9	3,2	3,2	480
4PTS7	PTS 7	0,4		370
4PTS8	PTS 8	0,4		425
4PTO6	PTO 6	0,8		310
4PTO7	PTO 7	0,8		370
4PTO8	PTO 8	0,8		425
4PTF7	PTF 7	1,2		370
4PTF8	PTF 8	1,2		425
4PTAA7	PTAA 7	1,6		370
4PTAA8	PTAA 8	1,6		425
4PTAA9	PTAA 9	1,6		480
4PTBB7	PTBB 7	2,4		370
4PTBB8	PTBB 8	2,4		425
4PTBB9	PTBB 9	2,4		480
4PTCC7	PTCC 7	3,2		370
4PTCC8	PTCC 8	3,2		425
4PTCC9	PTCC 9	3,2		480
4PTDD7	PTDD 7	5,0		370
4PTDD8	PTDD 8	5,0		425
4PTDD9	PTDD 9	5,0		480
4PTP7	PTP 7	0,8		370
4PTP8	PTP 8	0,8		425



W61 – magnastat 005 61 036 99

Nr katalogowy	symbol	a(mm)	T(°C)
4CT5A6	CT5A 6	1,6	310
4CT5A7	CT5A 7	1,6	370
4CT5A8	CT5A 8	1,6	410
4CT5B7	CT5B 7	2,4	370
4CT5B8	CT5B 8	2,4	425
4PTBB9	PTBB 9	2,4	480
4CT5C6	CT5C 6	3,2	310
4CT5C7	CT5C 7	3,2	370
4CT5C8	CT5C 8	3,2	410
4CT5D7	CT5D 7	5,0	370
4CT5D8	CT5D 8	5,0	425



Weller®



4CT5AX7	CT5XA 7	1,6
4CT5AX8	CT5XA 8	1,6
4CT5BX7	CT5BX 7	2,4
4CT5CX7	CT5CX 7	3,2
4CT5CX8	CT5CX 8	3,2
4CT5DX7	CT5DX 7	5,0
4CT5DX8	CT5DX 8	5,0

370
410
370
370
410
370
425




W 101 – magnastat 005 61 046 99

Nr katalogowy	symbol	a(mm)
4CT6C7	CT6C 7	3,2
4CT6C8	CT6C 8	3,2
4CT6D7	CT6D 7	5,0
4CT6D8	CT6D 8	5,0
4CT6E7	CT6E 7	7,0
4CT6E8	CT6E 8	7,0

T(°C)

370
410
370
425
370
425



4CT6CX7	CT6CX 7	3,2
4CT6DX8	CT6DX 8	5,0

370
425




W 201 – magnastat 005 61 056 99

Nr katalogowy	symbol	a(mm)
4CT2E7	CT2E 7	7,0
4CT2E8	CT2E 8	7,0
4CT2F7	CT2F 7	10,0
4CT2F8	CT2F 8	10,0
4CT2G7	CT2G 7	11,0
4CT2G8	CT2G 8	11,0

T(°C)

370
425
370
410
370
425




4CT2EX7	CT2EX 7	7,0
4CT2EX8	CT2EX 8	7,0
4CT2FX7	CT2FX 7	10,0
4CT2FX8	CT2FX 8	10,0

370
425
370
425



SPI 16 – bez regulacji 005 64 005 99

Nr katalogowy	symbol	a(mm)
4SPI15210	CSPI15 210	0,4
4SPI15213	CSPI15 213	0,8
4SPI15212	CSPI15 212	1,2
4SPI15211	CSPI15 211	2,0

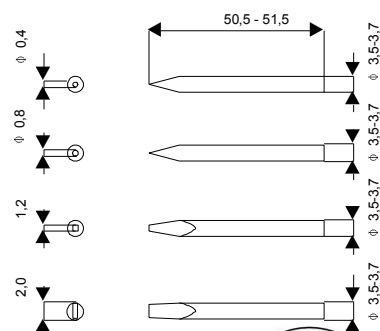

SPI 27 – bez regulacji 005 64 005 99

Nr katalogowy	symbol	a(mm)
4SPI126206	CSPI26 206	1,2
4SPI126200	CSPI26 200	2,0
4SPI126201	CSPI26 201	3,2

SPI 41 – bez regulacji 005 64 037 99

Nr katalogowy	symbol	a(mm)
4SPI40224	CSPI40 224	2,4
4SPI40225	CSPI40 225	3,0
4SPI40220	CSPI40 220	5,0
4SPI40226	CSPI40 226	2,0

SPI 81 – bez regulacji 005 64 037 99

Nr katalogowy	symbol	a(mm)
Groty proste		
4SPI80234	SPI80 224	3,0
4SPI80235	SPI80 225	5,0
4SPI80230	SPI80 230	7,0
4SPI80231	SPI80 231	9,0
Groty zagięte		
4SPI80237	SPI80 237	5,0
4SPI80232	SPI80 232	7,0

